

MEDAIR



Technical Assistance

Location:- Manthali

Devraj Gautam

Date:- 2017/02/06

Technical Assistance

- 1. Quality workmanship**
- 2. Construction Technology**
- 3. Quality Materials**
- 4. Local Resource Optimization**

Quality workmanship

1. Mason Training (DUDBC Curriculum-7 Days)



Is this sufficient?

No.

Model house construction for more practical training

Retain trained Mason in Community:-

Selection of Mason through PASSA

3. On site Day to day supervision and coaching



Challenge and Way Forward

- **More Masons Demand in community**
- **110 Houses being built, insufficient masons**

Way Forward

- **On the Job Training to Local semi-skilled Masons**
- **Other Any Ideas????- From This forum**

Construction Technology

Based on NB

Based on Cu

Motive:- Ear


1. Site Sele

2. Layout

3. Foundati

d from NRA

uction

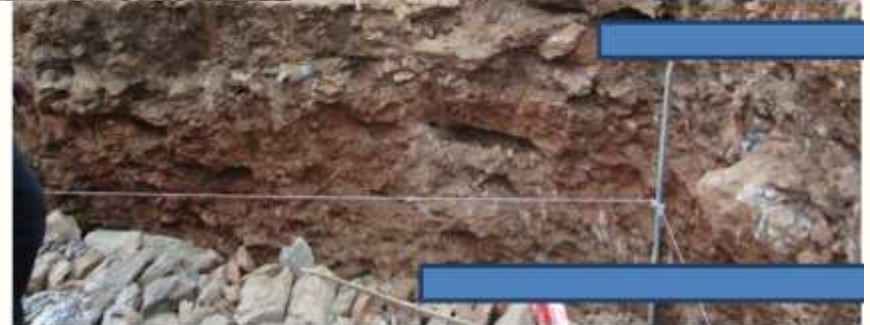

Contd.

- Erecting vertical Reinforcement from Foundation
- Challenges:
- Size of Steel, Timber not used, Placement in Doors and Windows







Quality Materials and Local Resource Optimization

1. **Orientation on Demolition and Debris Management**
2. **BOQ preparation before house reconstruction and Specifications of materials being used**

Challenge:

1. **Timber Bands Not acceptable for attic floor**
2. **Materials transportation problem**
3. **Through/Bond stones not easily available in some areas**
4. **Water Scarcity**

- **Non-Uniformity**

- **Vertical reinforcement from Plinth Level**
- **Sizes of rebar in Bands**
- **Opening in Walls**
- **Bamboo band used**
- **Gable Wall**
- **Wall Plate – Band in Roof level, RCC or Timber ?**

Any Questions?

Thank You