




ROHINGYA EMERGENCY RESPONSE COMMUNITY BASED APPROACH



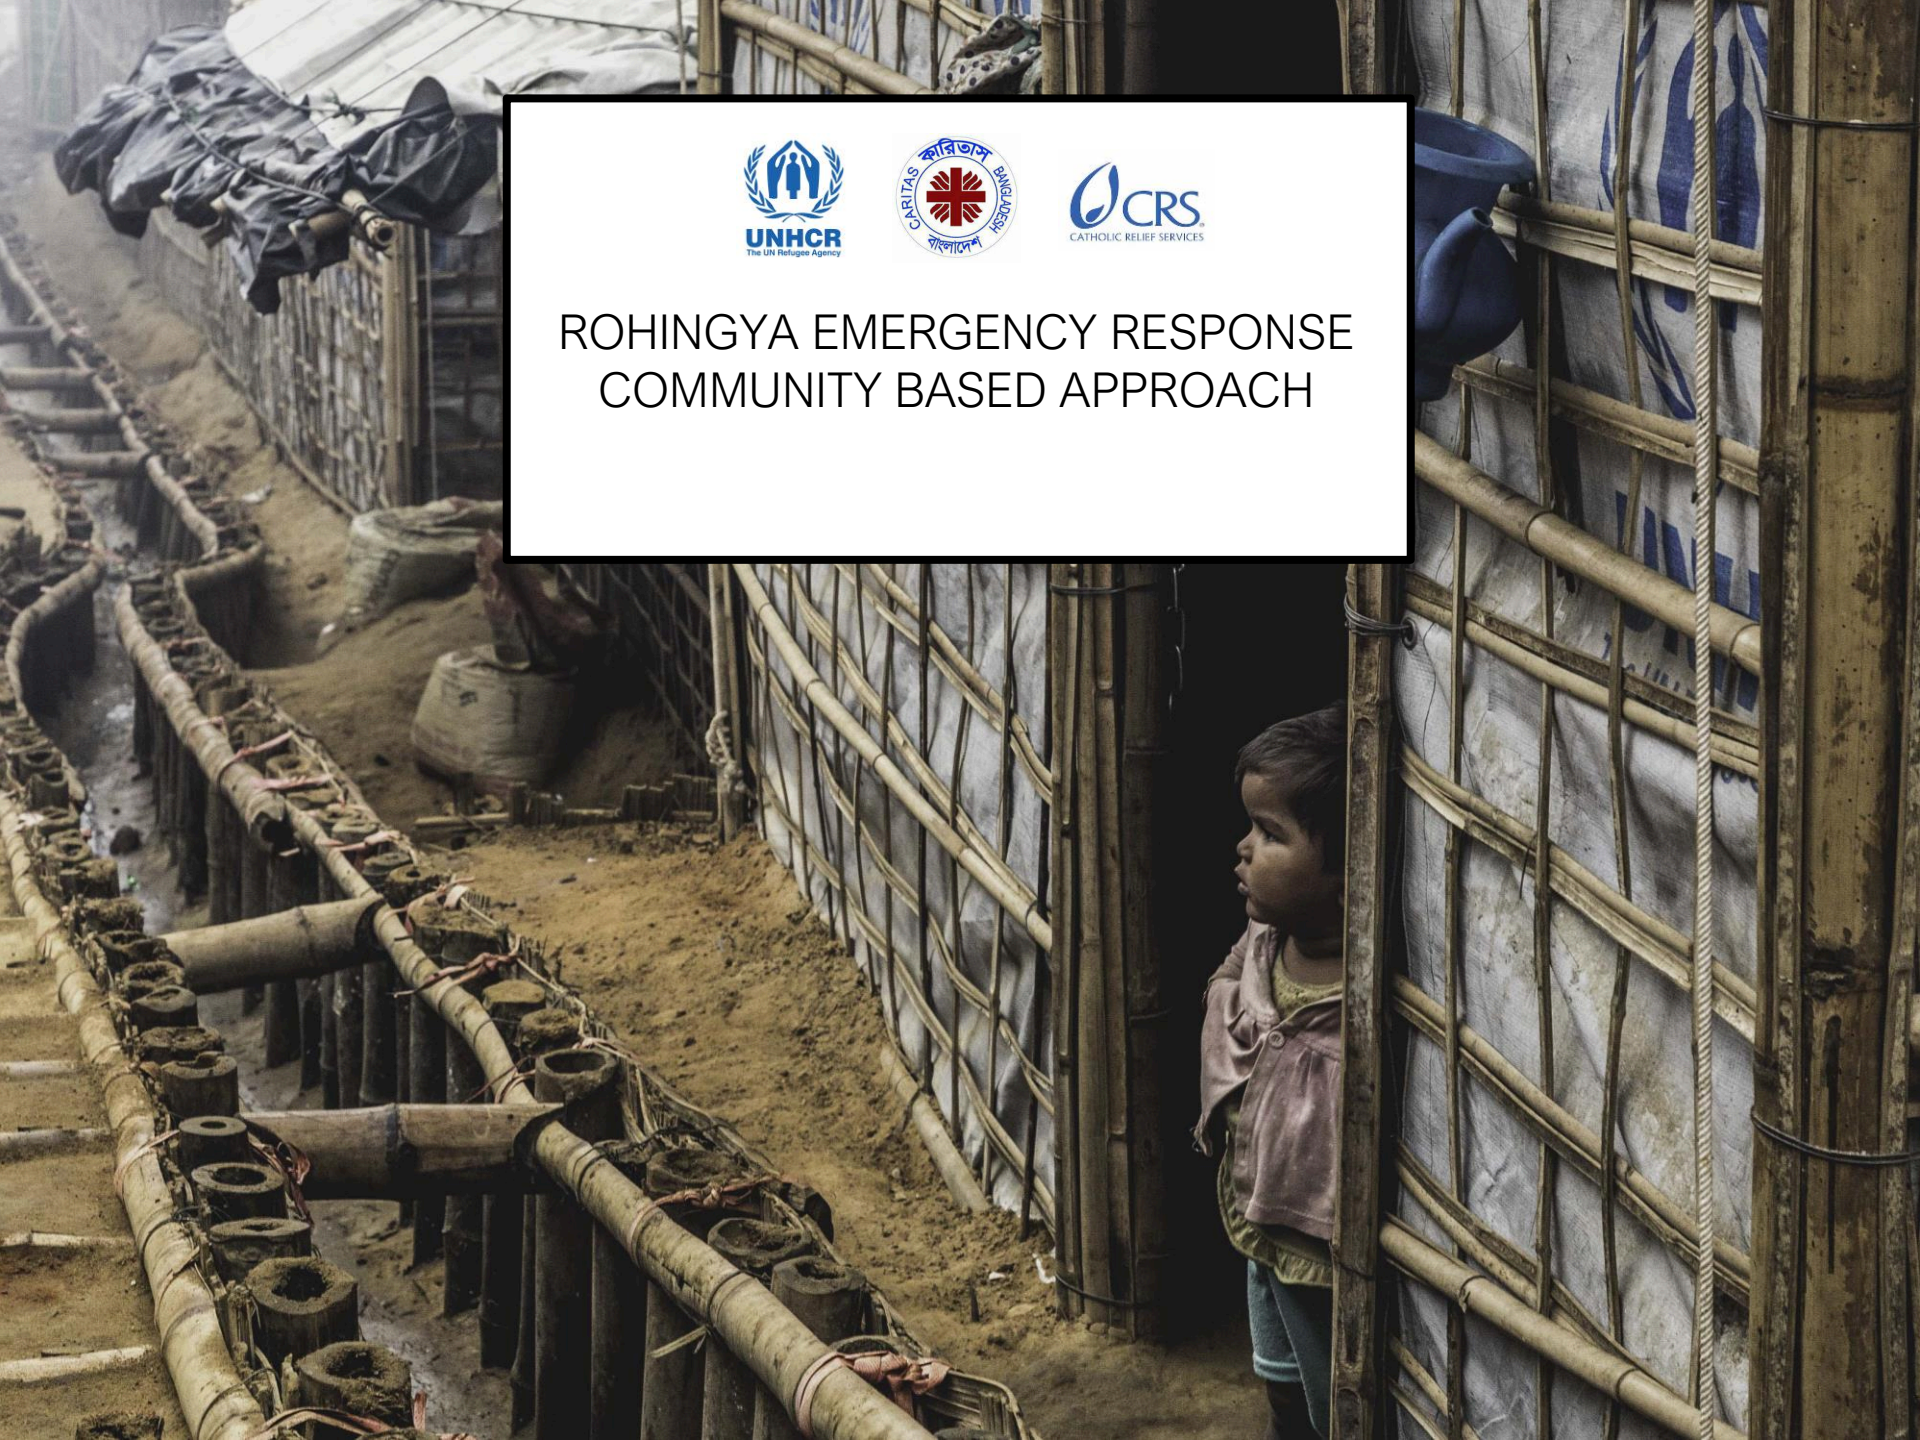

PROJECT OBJECTIVE

To demonstrate the benefits of community based approaches:

- To **improve the living conditions** and **reduce risks** from flooding and landslide, improve sanitation, improve physical access, and reduce protection risks
- To **enhance and strengthen social cohesion** and community capacity



Change Theory


Through **participatory approaches** to improve settlement and shelter conditions; that this will utilize the skills and capacity within the community to make the necessary improvements to their living environment; and through this experience and process that **it will lead to greater community cohesion** and organizational capacity; and to **help communities realize their potential** and be more resilient to future shocks and events.

Project Context



Location

- The Kutapalong Camp is subdivided into “**Zones**” which are subdivided into communities
- At this time communities are divided in groups of 100 – 120 HHs and under the leadership of a “**Majhi**”
- Area of work was in Zone BB, Majhis 17 and 20

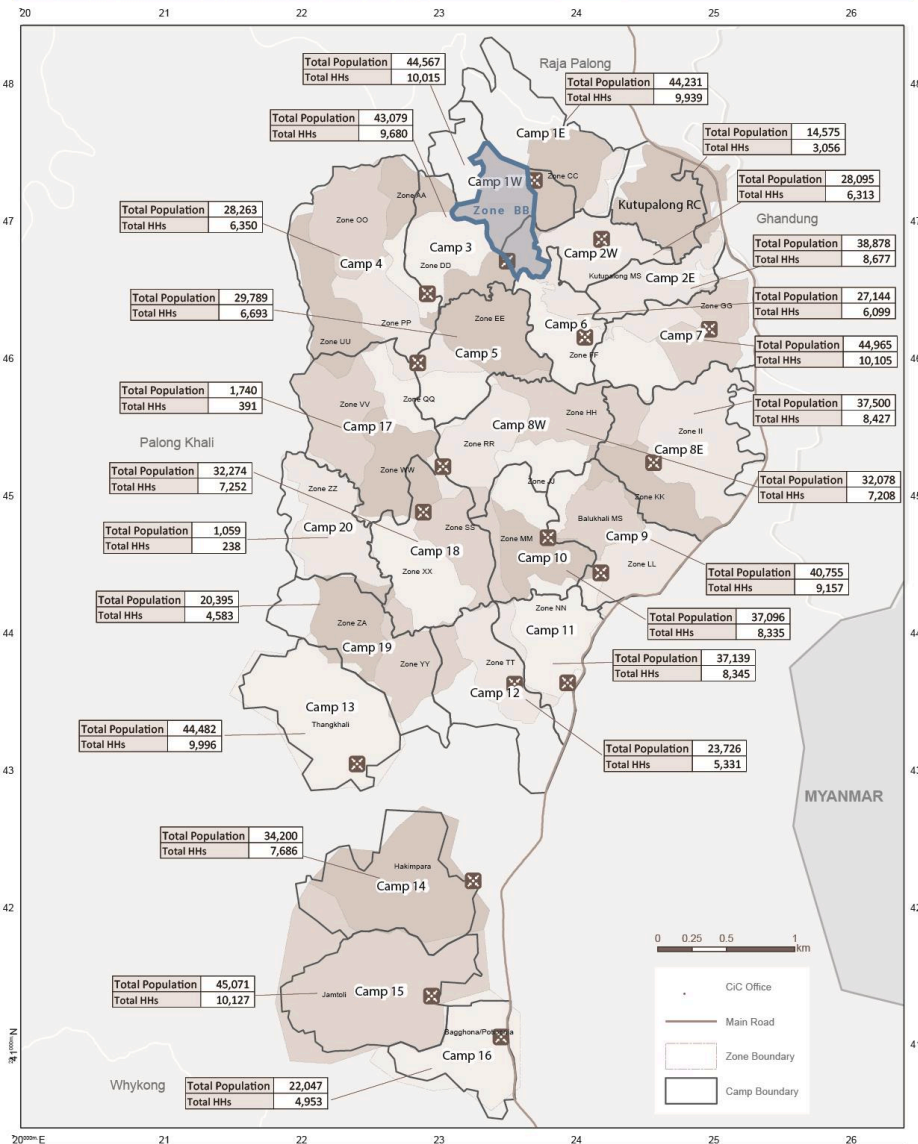


THE SITE

- Situated around a ravine with a seasonal water course at its center
- Shelters were of a poor construction
- Surface water drainage was limited to few shallow channels
- Little or no evidence of the community trying to improve or maintain the site

Need:

To be able to live in safe and habitable environment with dignity

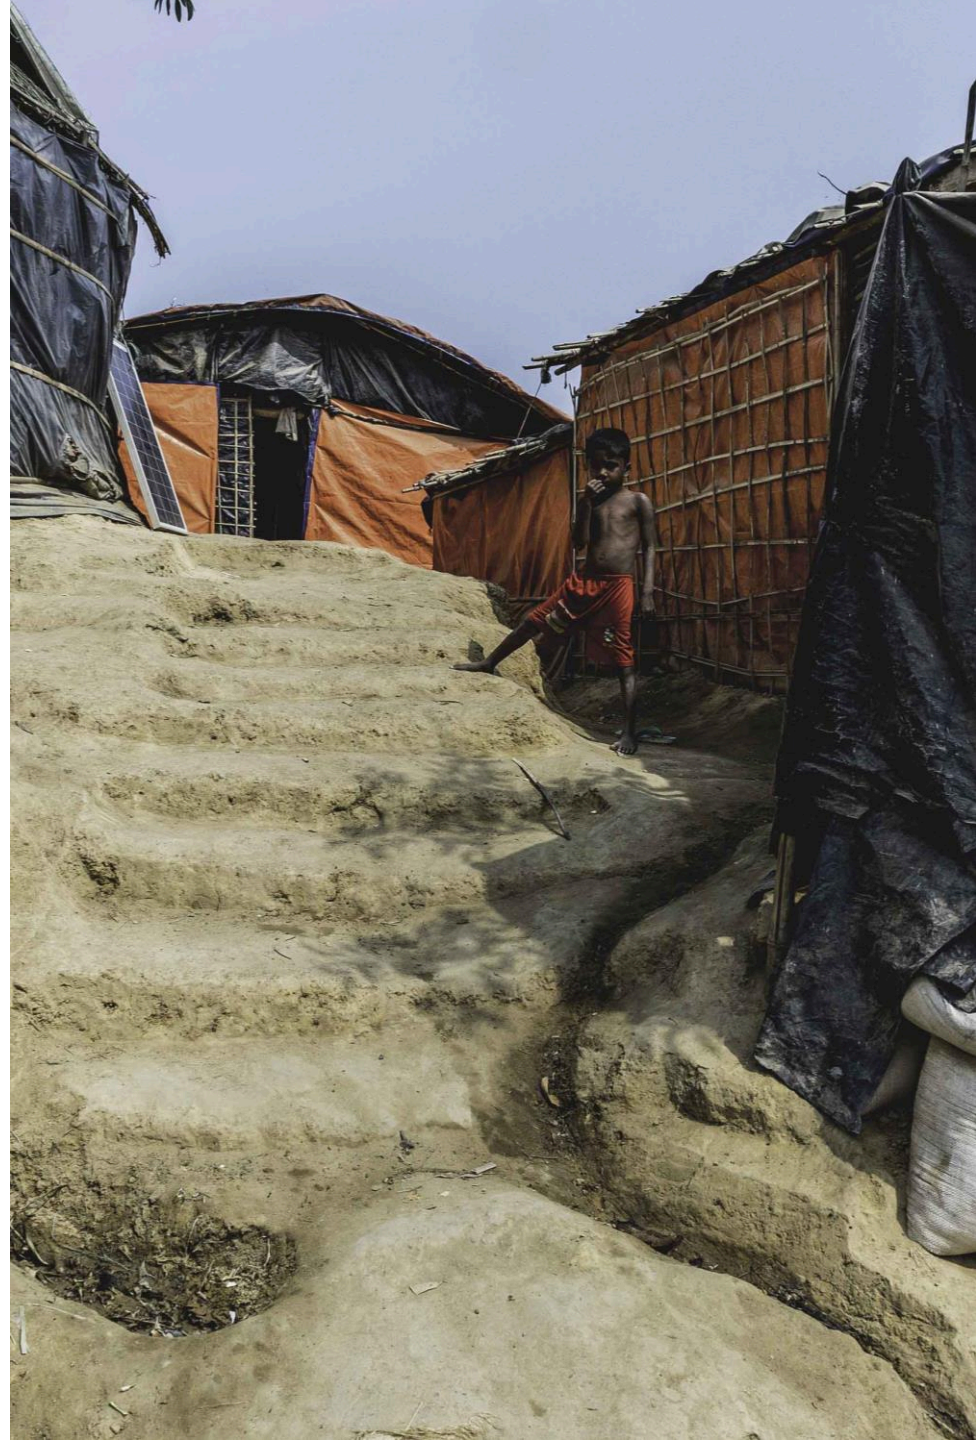

Shelter and Facilities - Majhi 17 and 20


Camp 1W, Kutupalong, Cox's Bazar, Bangladesh (January 2018)



Site Overview:

# of Shelter:	182	# of Bathing Place:	21
# of CFS:	1	# of Latrine:	34
# of Mosque:	2	# of Tube Well:	8
# of Street Light:	22		

Location Map:



Analysis

Physical Mapping

Using drone imagery and site sketches, Caritas staff with the assistance of the community produced a plan of the site.

Hazard mapping

Informed by flood risk maps and physical inspections with the community, areas at risk of flood and landslide were identified and marked on the site plan. This allowed hydrological modeling and engineering assessments, to be combined with the communities' perceptions and then visualized.

Funded by:



Legend:

Bathing Place	Shop	Drainage	FCN # Shelters
CFS	Solar Light	Pathway	Facilities
Latrine	Tube Well	Majhi Boundary	
Mosque			


CREATION DATE: 1/28/2018
PROJECTION: WGS 84 UTM 46N
SOURCES: UNHCR, IOM, REACH, ISCS, HDX
DISCLAIMER: The boundaries and names used on this map do not imply official endorsement or acceptance by Caritas/CRS.

Risks

To evaluate the risks perceived by the communities, Caritas Bangladesh organized **four focus groups**.

The results of these focus group discussions were essential in understanding how safe or unsafe the communities perceived their Majhis after the improvements were completed and to understand their **possible behaviors during an emergency**, especially for flood and cyclone.

One suggested solution for **cyclone preparedness** was to organize in small household clusters and to **reinforce one shelter as a cyclone shelter**.

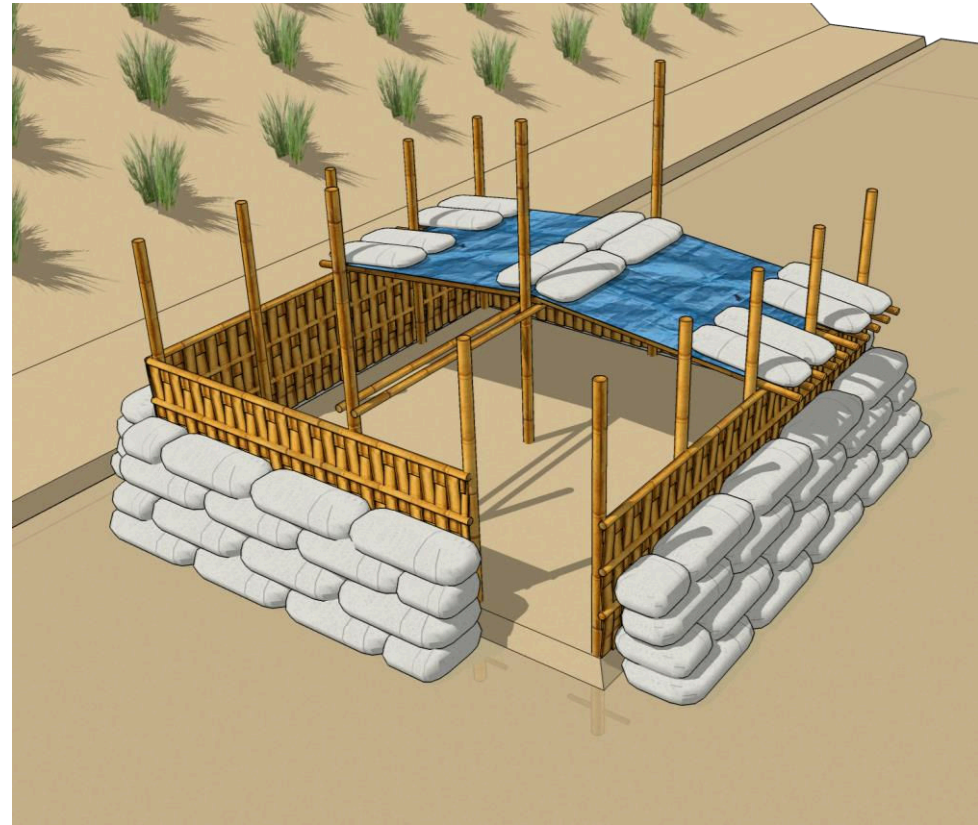

TECHNICAL SOLUTIONS



November 2017



February 2018



SHELTER CONSTRUCTION


The shelter was constructed following the main guidelines provided by the Shelter Sector and other improvements, that included:

- Plot preparation, including any retaining walls or drainage
- A raised plinth to avoid surface water entering the dwelling during heavy rains
- Ground connections fitted to vertical posts to prevent uplift
- Strong wall and roof connections
- Diagonal bracing
- Bamboo reinforced fitting of tarpaulin wall and roof covering
- Bamboo ventilation mesh
- Lock and chain for doors

RETAINING


WALLS

For bamboo retaining walls over 4' high, the tops of the walls were 'stitched' back using rope and peg a technique from World War I trench construction.

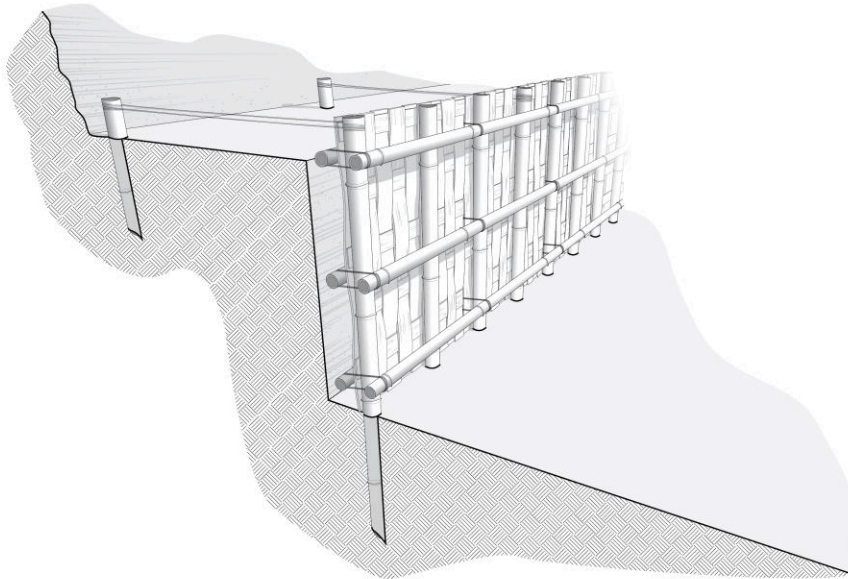

STAIRS


Steps formed using bamboo and backfilled with earth were most effective but require continuous repair and maintenance.

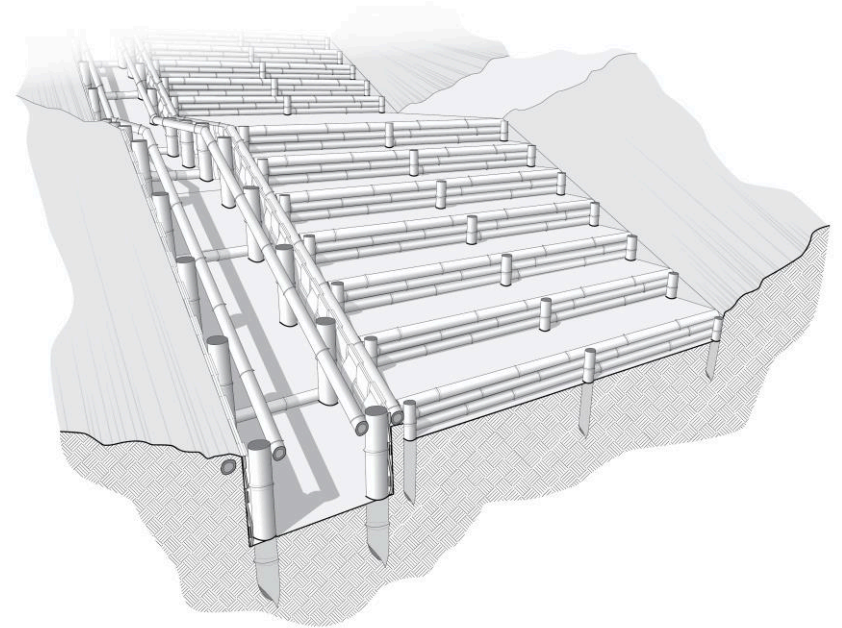

RETAINING

WALLS

The drains were either constructed as open earth ditches or had **channels formed using bamboo walled sides**. The base of some of the drains were lined with sand / cement screed that allowed the drain to be cleaned, which proved effective to avoid stagnant water.

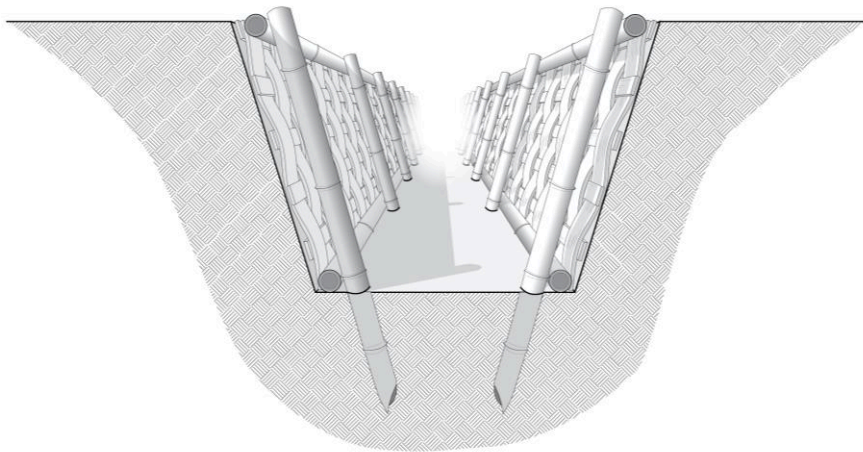

WASH

New boreholes and hand pumps were installed on the site to supplement existing facilities. Due to the space constraints, alternated twin pit latrines could not be constructed, instead opting for direct drop single pit latrines.





STREET LIGHTING

A total of 22, 20W LED, solar street lights were installed. The location of the lights was decided with the community.

KITCHEN GARDENS

As part of the site improvements, Caritas agricultural specialists introduced simple grow bags and provided plants and seeds so that households could grow vegetables.

RESULTS





ENVIRONMENTAL IMPACT

In less than 2 months:

- nearly 2.5km of community infrastructure where built through cash for work
- 20 bathing units were built and all 182 homes were upgraded
- 22 solar lamps and 30 latrines were installed by private contractors
- 6 community maintenance committees were created
- Leadership, interest and community pride has increased
- Increase of the care for the environment noticeable
- Community cohesion has improved

November 2017




February 2018



COSTS

The total cost for the site improvements is **\$484 per household**. Community infrastructure, specifically related to flooding and landslide hazards and erosion (retaining walls, drainage, pathways and bridges), constituted less than 10% of costs. A significant contribution to the pilot project, the **in-kind labor for shelters and bathing spaces** was valued at over \$8,000.

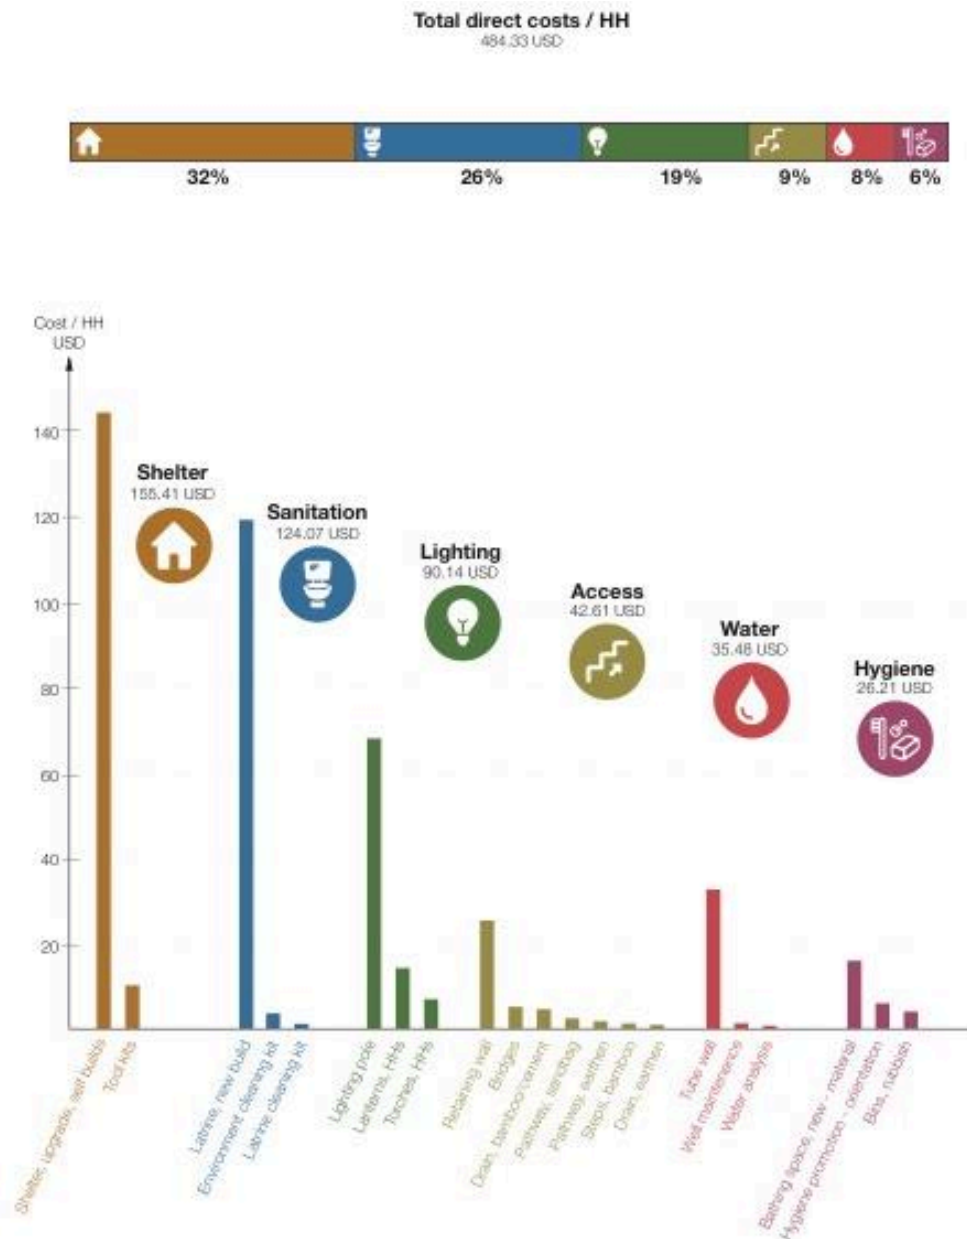


SOCIAL BENEFITS

A household survey was conducted where 40 community members as well as 40 members from a control group (20 men and 20 women) - **22% of households** - were asked a series of **75 questions**.

Major findings on community cohesion:

- Majhi 17, 20 were significantly **more likely to go to other community members when they had a problem** compared to the control group.
- Majhi 17, 20 report being **more connected to their community**.
- The survey data shows that Majhi 17, 20 tend to use a **greater range of groups to support them** when they have a problem.

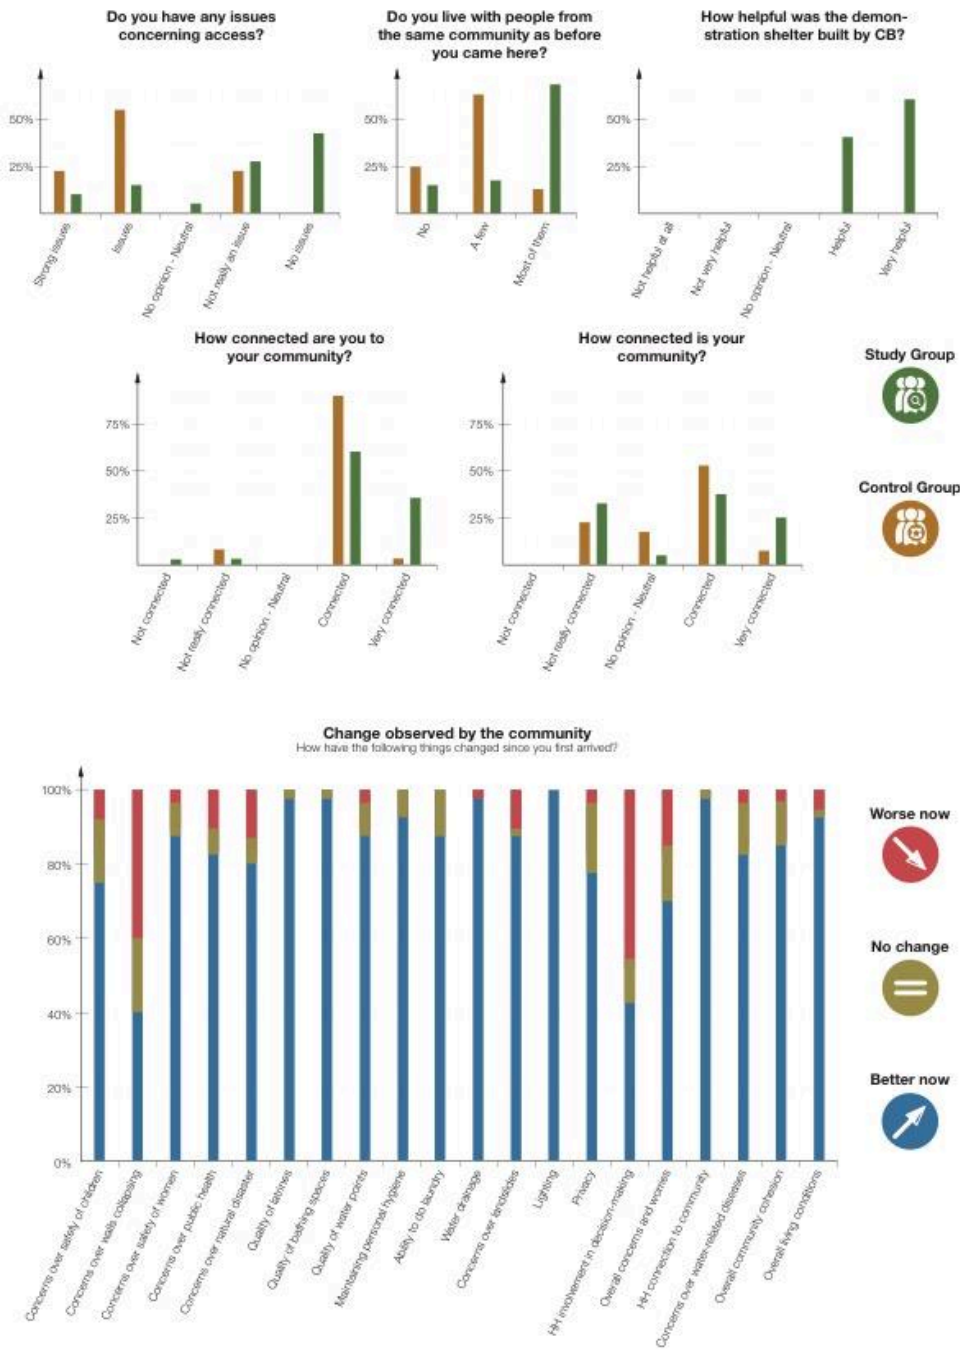



RECOMMENDATIONS



RECOMMENDATIONS

The Lessons Learnt report presents recommendations and suggestions on the following:

- Process as a priority
- Agreement and Engagement
- Transparency
- Mapping as an essential tool
- Ownership
- Consensus
- Gender
- Integrated

STEP BY STEP GUIDE





INTRODUCTION

- Approval from the CiC and other authorities
- Meeting with key communities leaders and stakeholders to introduce the program, explain processes, roles and responsibilities
- Agreement with the community



ORGANISATION, INFORMATION SHARING, COORDINATION

- Household clustering
- Committee identified (M/F) from clusters and key community stakeholders
- Community information sharing – notice board, help desk (focal point)



ASSESSMENT

- Produce plan of existing site
- Complete household survey
- Site Hazard and Risks Assessment
- Community Capacity (skilled and unskilled labour)
- Existing knowledge Attitude and Practices for shelter, WASH, monsoon and cyclone



MAPPING AND PLANNING

- Review and revise site plan
- Produce a list and schedule of the improvements for each cluster of households
- For each task identify the resources needed (community and agency)
- Identify the roles and responsibilities
- Identify the training needs and activity



IMPLEMENTATION

- Supply of materials
- Technical supervision
- Monitoring and supervision of the work
- As built site plan revisions



MAINTENANCE

- Technical specifications and schedule for maintenance
- Resources
- Roles and Responsibilities



DRR

- Identifying hazard and risk scenarios
- Planning responses
- Resources
- Roles and Responsibilities
- Training and Information Sharing



FUTURE PLANNING AND IMPROVEMENTS

- Technical specifications
- Schedule
- Resourcing

Questions

