

Experience Sharing: District Inspection SOP Orientation for POs


Narayan Marasini
National Technical Coordinator
HRRP

Wednesday, 1st March 2017
DUDBC Conference Hall


Introduction

- Almost 625,000 HHs are eligible to receive the 300,000 NPRs GoN housing reconstruction grant
- Increase expected with HHs eligible for 100,000 NPRs retrofit grant and following completion of 17 districts survey
- HRRP district teams reported lots of confusion amongst district stakeholders regarding inspection process – orientation for POs organized by HRRP to address this
- Orientations were conducted during December 2016 and February 2017 in 11 districts outside of KTM valley
- Objective of the orientation was to ensure that POs understand the inspection process, who is responsible, and how they can support households to understand the process


Construction Technology

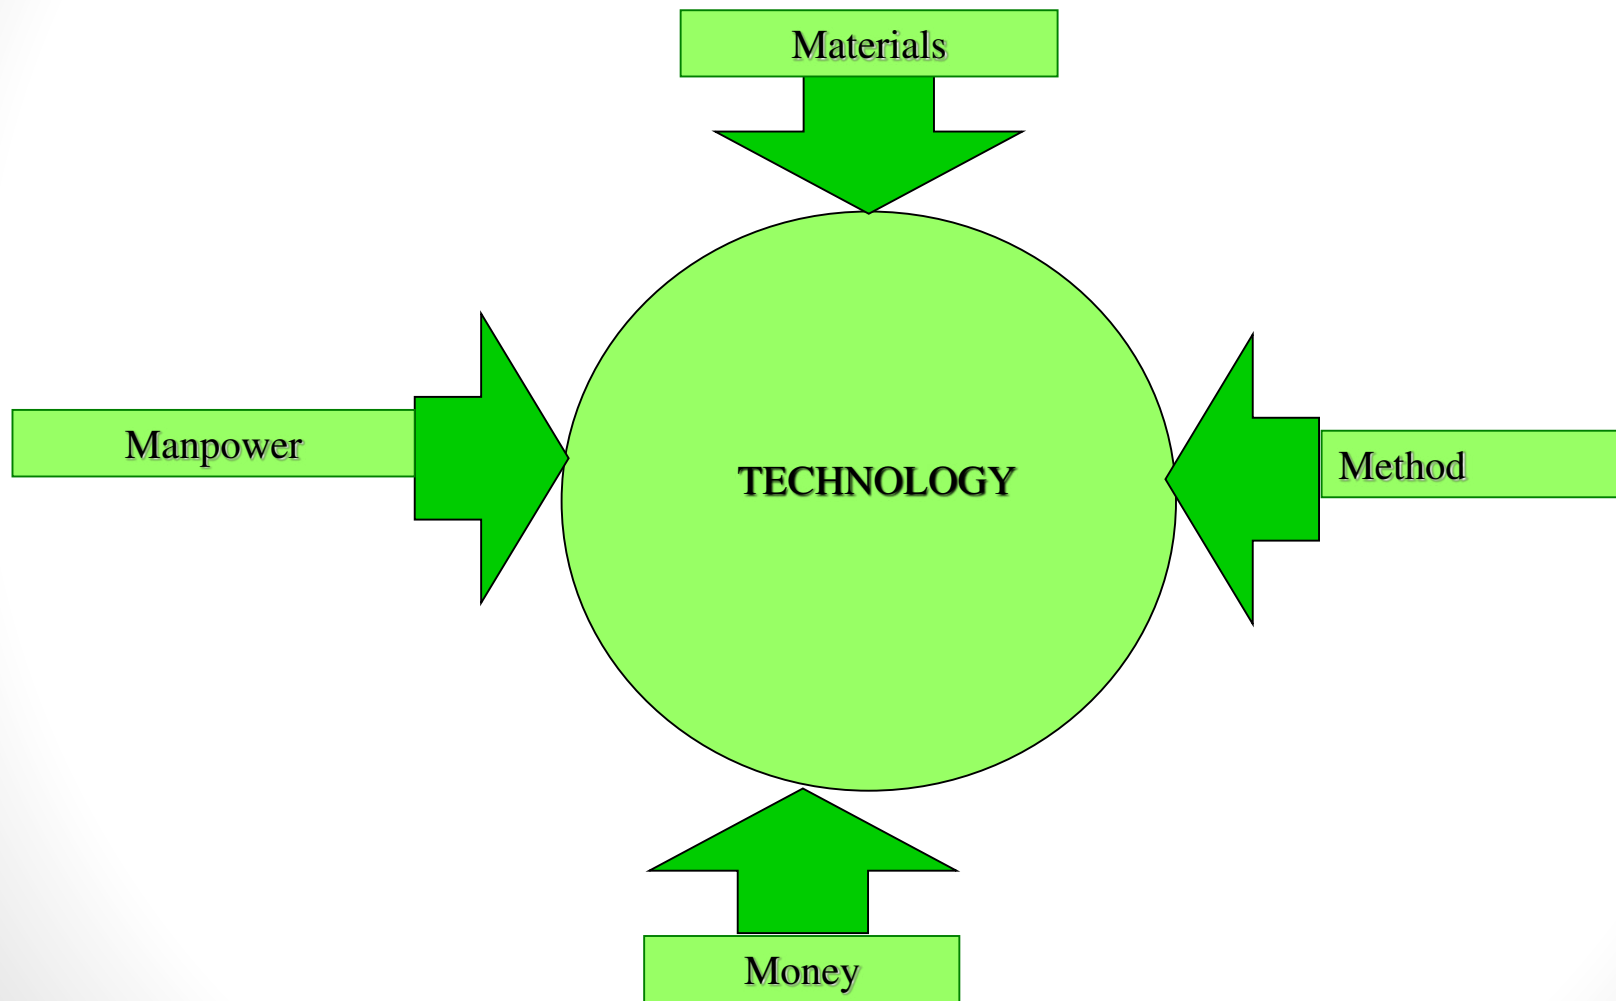

Key Stakeholders

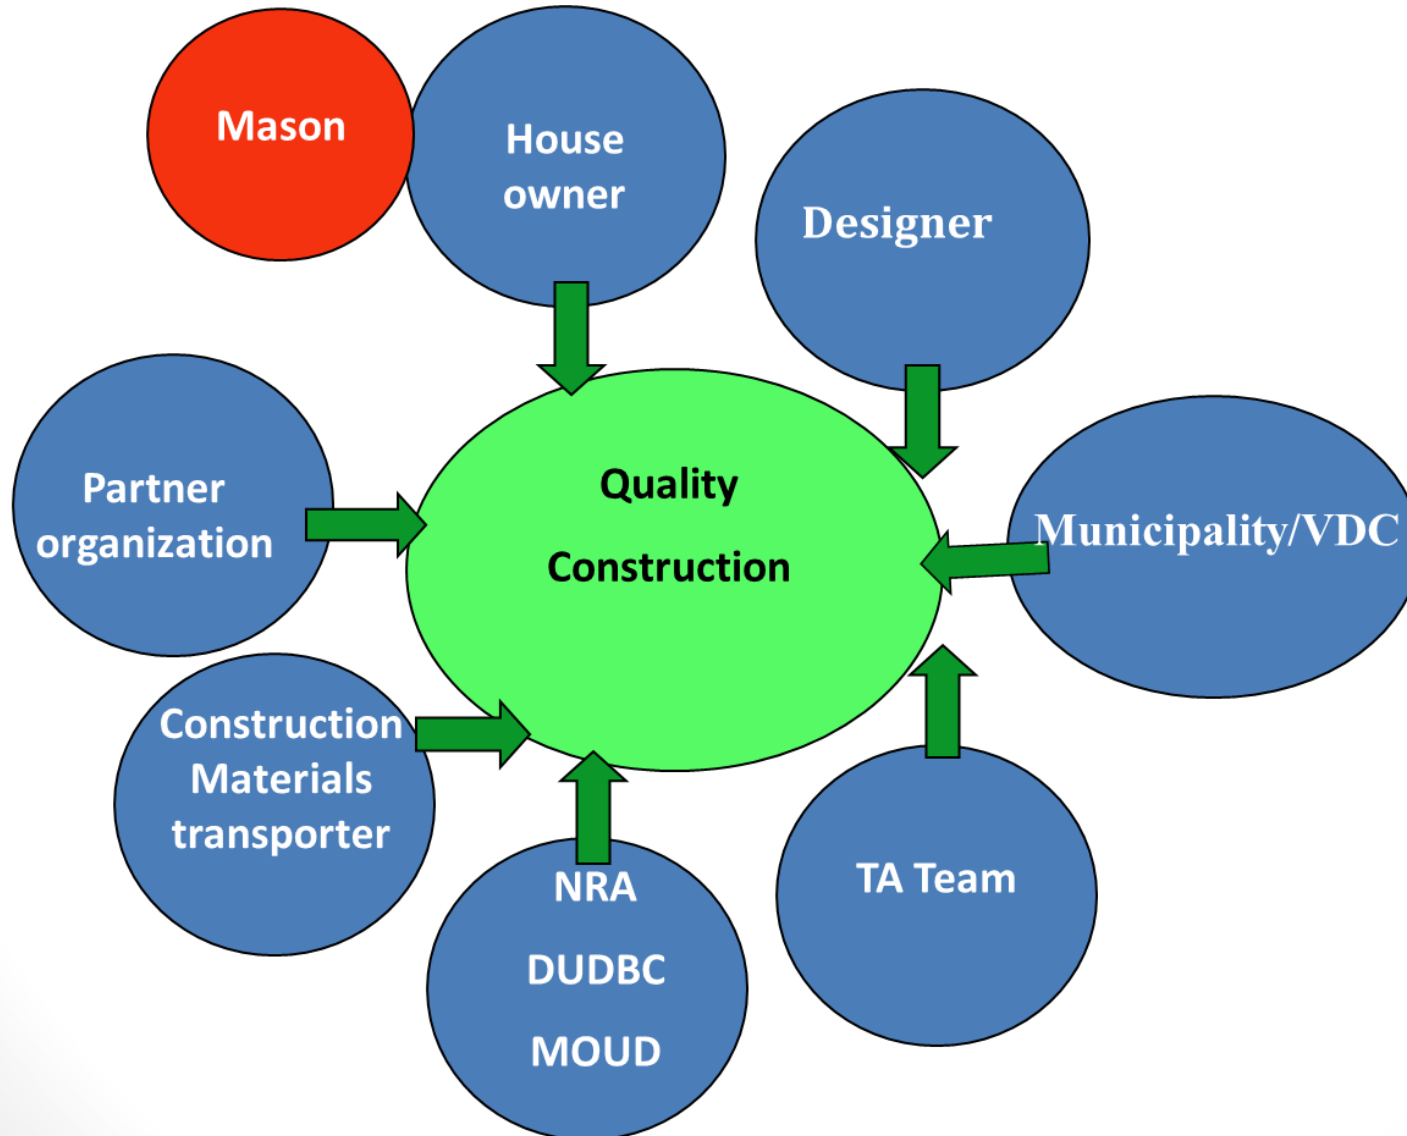

Safe Re-construction Factors

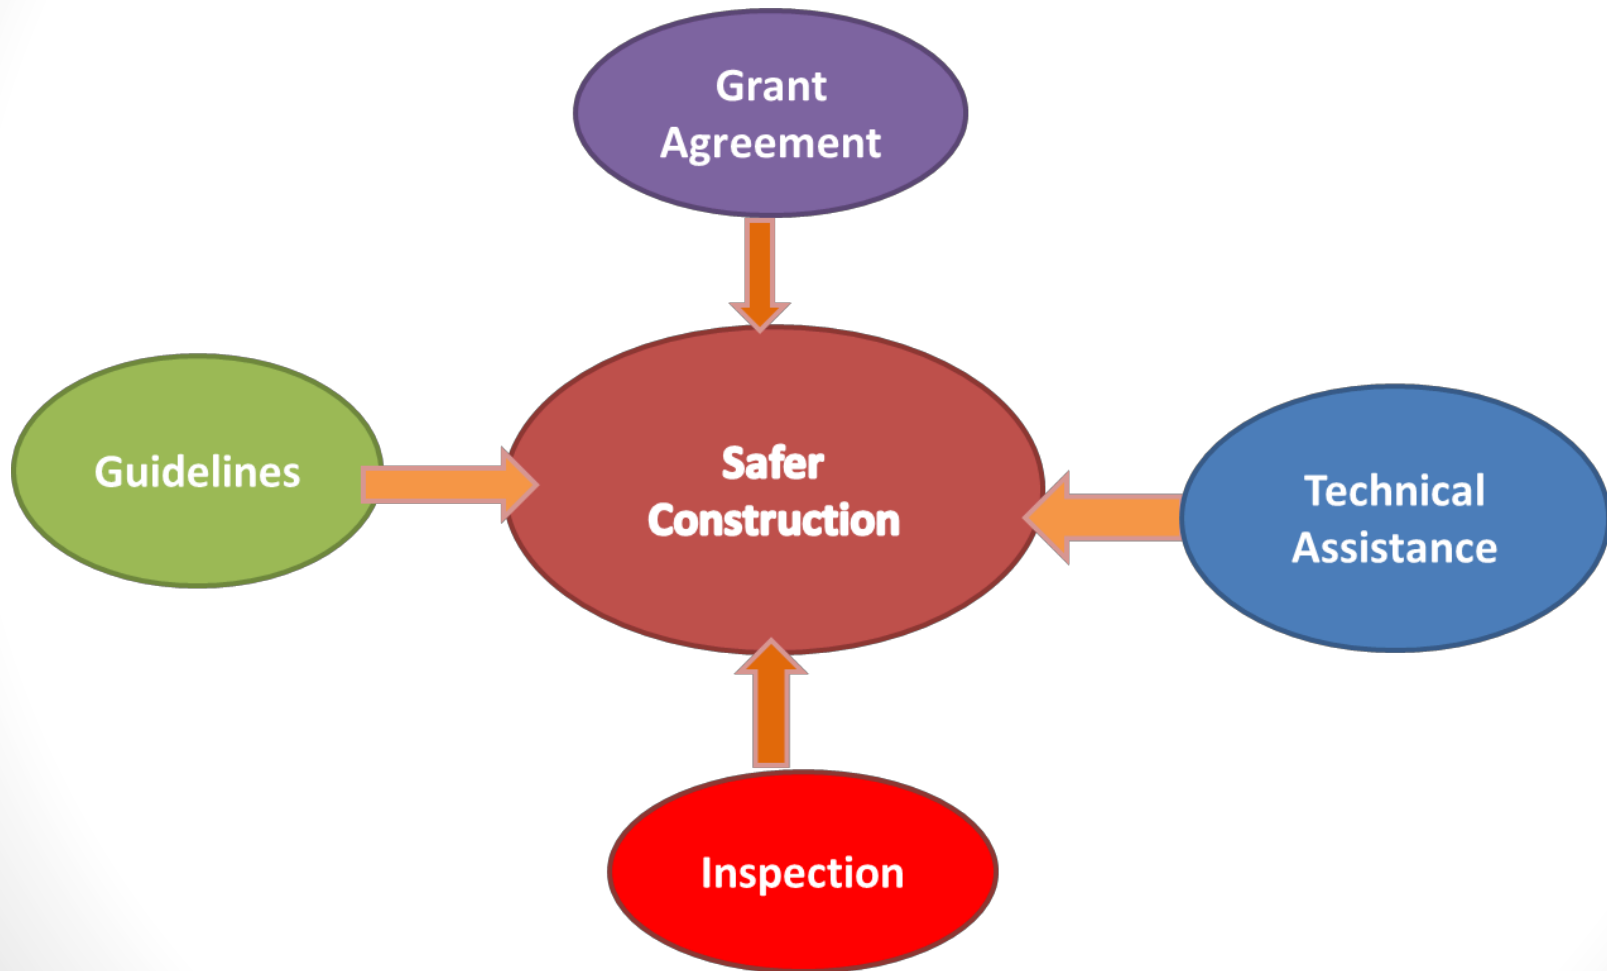


Orientation Content

- Outline of Inspection SOP process
- Inspection forms for each step of the process
- Roles and responsibilities of stakeholders for the inspection process
- Roles and responsibilities of concerned authorities in the overall reconstruction process, presentation of relevant policy and guidelines
- Questions and discussions with participants

Orientation Participation

S.N.	District Name	NRA	DLPIU	POs	Total
1	Nuwakot	1	2	23	26
2	Dhading	1	5	17	23
3	Dolakha	1	5	26	32
4	Gorkha		1	19	20
5	Kavre	3	4	26	33
6	Rasuwa	2	20	27	49
7	Makwanpur		2	30	32
8	Sindhupalchowk	1	1	23	25
9	Okhaldhunga	1	3	23	27
10	Ramechhap	1	2	20	23
11	Sindhuli	2	4	11	17
Total		13	49	245	307

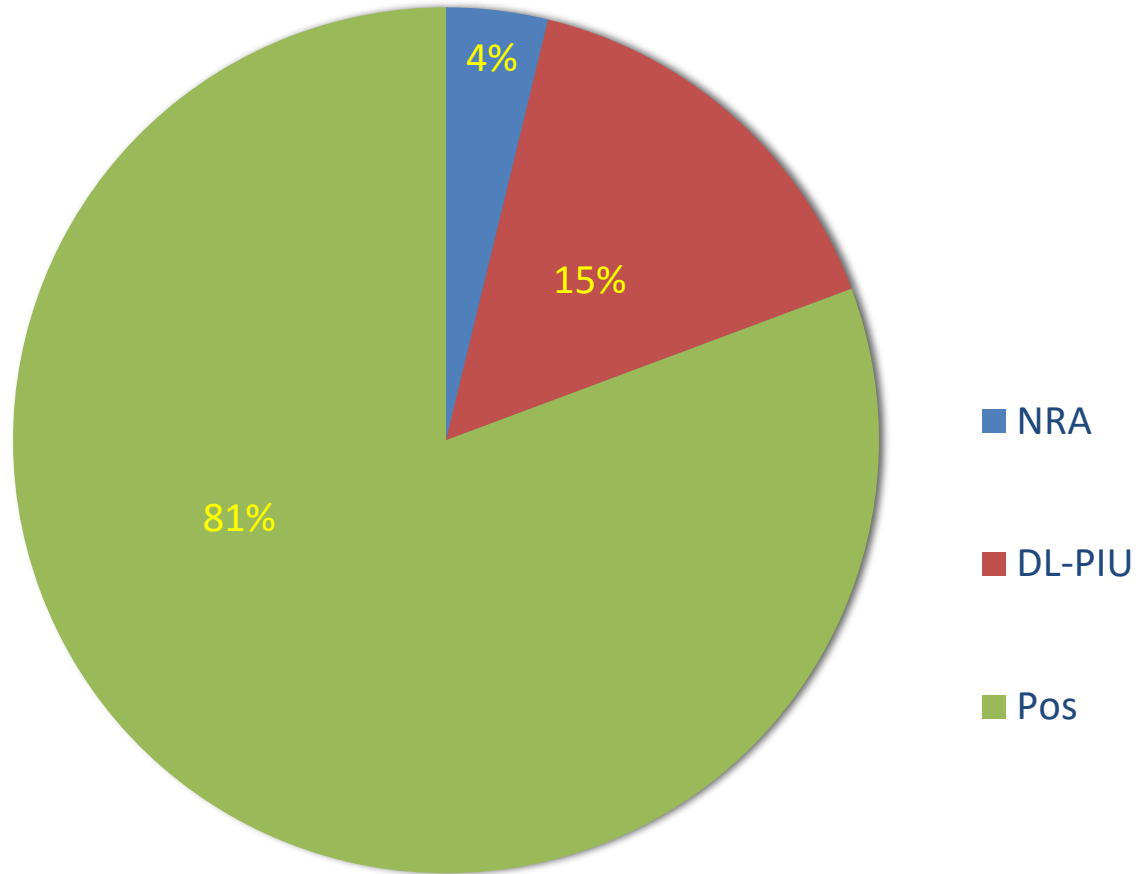

Some Glimpses



Summary of Discussions

- **Roles and Responsibilities & Coordination amongst stakeholders**
 - POs to provide technical assistance, working with DL-PIU engineers and VDC secretaries. Only DL-PIU engineers can conduct inspections.
 - POs working in VDCs can print and distribute inspection forms.
 - As part of technical assistance, POs can support HHs with selecting or amending their house design, as per NBC.
 - POs keen to access retrofitting guidelines and list of eligible HHs and to understand how this will be operationalised.
 - Inspection SOP not seen as inclusive as poor / vulnerable HHs will not be able to comply with the minimum requirements.
 - Inspection process may be challenging due to high levels of illiteracy and perceptions that the process is very difficult.

Summary of Discussions Contd.

- **Technical Challenges**

- High level of non-compliances perceived by POs, difficult to encourage HHs to carry out corrections
- Absence of tolerances in process potentially leading to higher level of non-compliances
- Inspection SOP does not include dry stone constructing using timber banding or hybrid construction – 2nd vol of designs?
- 10 key messages leaflet does not cover all MRs but has been used widely
- Houses constructed by connecting 2 houses together – eligible for 2nd tranche?
- Single storey stone and mud masonry buildings do not meet the requirements that people have for the space in their homes

Summary of Discussions Contd.

- **Technical Challenges**

- NBC MRT states 10mm diameter steel rebar reqd. for the horizontal band but in vol. 1 of the DUDBC design catalogue 12mm rebar is recommended
- HHs are keen to use RCC band at plinth level and timber bands at sill, lintel, and roof level
- It was not clear if timber banding with stone and cement mortar masonry was permitted or not
- POs have not been able to access the revised versions of NBC 202, 203, and 205
- Inspection form for Stone Masonry states that area should not exceed 13.5 sq. m but this is not included in NBC
- NBC 205 specifies min. spacing of columns should be 2.1m but this has not been included in the inspection form.

Summary of Discussions Contd.

- **Timber**

- The inspection forms do not specify the required quality of timber for different types of bands and components.
- NBC specifies the correct size of different timber components for various types of bands, but some participants informed that this has been delivered differently during trainings in the field and that some demonstration houses have used excessive amounts of timber.
- Treatment and seasoning of timber considered to be the major challenge in some areas.

Summary of Discussions Contd.

- **Land Issues**

- In some areas VDCs on steep slopes, of greater than 20 degrees, have been found to be safe for reconstruction.
- Questions were raised about the availability of standards/specifications on the age limit of filled sites for construction of housing.
- In some areas, road expansion is affecting eligible households as their land is being reduced, in some cases dramatically. Certification of completed houses is different for the reconstruction grant and the case of road widening.
- There are some locations where the government has assessed land and declared that the settlement(s) need to relocate as the land is not safe for reconstruction. However, households have started to reconstruct on the unsafe land using the first tranche of the housing grant.

Follow Up & Action Points

- HRRP to work with NRA and MoUD CL-PIU to support operationalisation of retrofitting grant disbursement
- HRRP to look into possibilities to provide similar orientation programmes at district level. District technical workshops are being organised January and February 2017.
- Issues raised by partners during the orientations are discussed during the HRRP district coordination meetings.
- HRRP will provide POs with orientation materials on the inspection SOP for household / community level. These materials will be disseminated to POs through the HRRP district coordination meetings in the coming weeks.

Follow Up & Action Points Contd.

- **POs will work to expand coverage and quality of technical assistance**
- Coordination and cooperation between POs and DL-PIU technical staff should be strengthened to ensure strong support for the inspection process.
 - E.g. joint teams for technical assistance made up of technical persons from POs and DL-PIU

Thank you